


## HIGH PRECISION UV INDUSTRIAL ROLL TO ROLL PRINTER 6.2'



PRINTHEAD	HIGH SPEED MODE	STANDARD MODE	HIGH QUALITY MODE	INK COLOR
RICOH G5-7PL 3/4Heads	720x600 dpi 4pass 150 ft <sup>2</sup> /h (14 m <sup>2</sup> /h)	720x900 dpi 6pass 107 ft <sup>2</sup> /h (10 m <sup>2</sup> /h)	720x1200 dpi 8pass 64 ft <sup>2</sup> /h (6 m <sup>2</sup> /h)	KCMY W
RICOH G5I-3.5PL	720x600 dpi 4pass 80 ft <sup>2</sup> /h (7.5 m <sup>2</sup> /h)	720x900 dpi 6pass 60 ft <sup>2</sup> /h (5.6 m <sup>2</sup> /h)	720x1200 dpi 8pass 40 ft <sup>2</sup> /h (3.8 m <sup>2</sup> /h)	KCMY W V

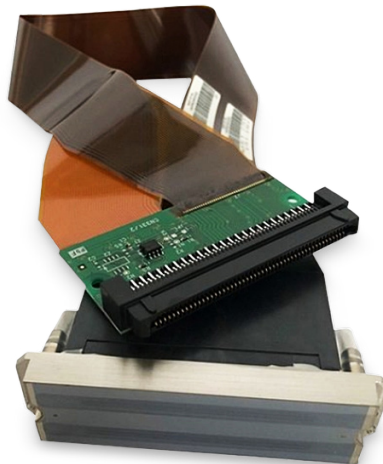

## TECHNICAL PARAMETERS

<b>Print technology</b>	Industrial Piezoelectric Inkjet
<b>Ink Types</b>	Environmental Protective UV Ink
<b>RIP Software</b>	Photoprint, Maintop, Printer factory
<b>Color configuration</b>	4Color / 6Color / White
<b>Operating system</b>	Win 7/10 64bits
<b>Image format</b>	TIFF/JPEG/EPS/PDF
<b>Print head height</b>	0.3in (8mm) above media adjustable
<b>Media type</b>	Wall covering paper, canvas, outdoor & event banner, vehicle graphics, backlits, textiles, vinyl sheet indoor, light box cloth, etc...
<b>Printing Width</b>	6.2 ft (1900mm)
<b>UV Curing Lamp</b>	LED Water Cooling System
<b>Data interface</b>	Hi-Speed USB 2.0
<b>Maximum power</b>	> 15A ; 2.5KW
<b>Access Parameter</b>	AC220V (+-5%) 50HZ/60HZ
<b>Humidity</b>	35-80% RH (no condensing)
<b>Temperature</b>	25-32°C (77 - 90° F)
<b>MacVThine dimension/Weight</b>	L9.6 x W2.5 x H4.6 ft / 573 lb L2,950 X W760 X H1400mm / 260Kg
<b>Package Dimension /Weight</b>	L11 x W2.4 x H2.6 ft / 749 lb L3,350 X W740 X H790mm / 340Kg