


MULTI-FEATURED UV FLATBED PRINTER [6'X3'] FOR RIGID MEDIA SUBSTRATES



PRINTHEAD	HIGH SPEED MODE	STANDARD MODE	HIGH QUALITY MODE	INK COLOR
RICOH GEN5I - 3.5P	720x720dpi 4pass 80ft2/m (7.5m2/h)	720x900dpi 6pass 60ft2/m (5.6m2/h)	720x1440dpi 8pass 40ft2/m (3.8m2/h)	KCMY W V
RICOH GEN5I - 3.5PL	720x720dpi 4pass 140ft2/m (13m2/h)	720x900dpi 6pass 86ft2/m (8m2/h)	720x1440dpi 8pass 64ft2/m (6m2/h)	KCMY W
RICOH GEN5-7PL	720x720dpi 4pass 150ft2/m (14m2/h)	720x900dpi 6pass 107ft2/m (10m2/h)	720x1440dpi 8pass 64ft2/m (6m2/h)	KCMY W V

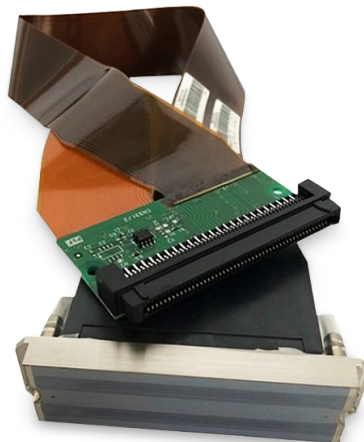

TECHNICAL PARAMETERS

Print technology	Industrial piezoelectric inkjet
Ink Types	Enviromental protective UV ink
RIP Software	Photoprint, Maintop, Printer factory
Color configuration	4Color/White
Operating system	Win 7/10 64bits
Image format	TIFF/JPEG/EPS/PDF
Print head height	Up to 3.3" (85mm) above media adjustable
Media type	Wood, aluminum, door plank, paperboard, PVC, expansion sheet, ceiling panel, glass ceramics, acrylic, etc
Printing Width	Panel: 6ft X 3 ft; 1800mm(Width) x 1000(Depth)mm
Maximum weight of material	<= 53 lb/ft (80kg/m)
UV Curing Lamp	LED Water cooling system
Data interface	Hi-Speed USB 2.0
Maximum power	> 20A ; 4.5KW
Access Parameter	AC220V (+-5%) 50HZ/60HZ
Humidity	35-80% RH (no condensing)
Temperature	25-32C (77 to 90F)
MacVThine dimension/Weight	8.5ft x 7.8ft x 4.9ft /1278lb(2610x2380x1500mm)
Package Dimension /Weight	9.3ft x 8.0ft x 5.5ft /1587lb(2860x2460x1680mm)